

→ 简介

/

( )

→ 技术参数

防爆等级: [Ex ia Ga] IIC

供电电源:

(14+ 15-)


18V DC ~ 60V DC ( 24V DC)

输入信号类型 (1 2 3):

允许引线电阻: ≤ 20 Ω/

输出信号类型 (7 8 9 10 11 <sup>1</sup>)

C

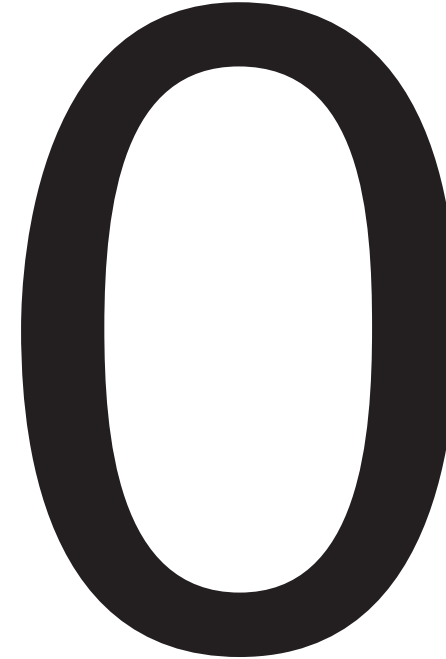

IEC 60584-1	K	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	E	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	J	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	T	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	N	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
	S	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	R	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	B	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
	W5Re-W26Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
ASTM E988-96	W3Re-W25Re	<500°C, ±0.5°C; ≥500°C, ±0.1%F.S.
GOST R8.585	L	<300°C, ±0.3°C; ≥300°C, ±0.1%F.S.
IEC 60751	Pt100 (α=0.00385)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Pt100 (α=0.00391)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
GOST 6651	Cu50 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00428)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu50 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.
	Cu100 (α=0.00426)	<100°C, ±0.1°C; ≥100°C, ±0.1%F.S.

Nanjing New Power Electric Technology Co., Ltd.

→ BUS规格

BUS	
	Max. 8A
(UL/IEC)	1.6kV
	-40°C~+105°C

→ 安装

- DIN IEC 60715 35mm
- 

A. BUS DIN 35

B. DIN BUS BUS

C.

D.



→ 面板显示

- PWR: ( )
- ALM: ( )
- LED LED RTD: ( )
- LED TC: LED

→ 编程及校准

- 
- 
- 
- 

→ 注意事项

- IP20 ( )
- IEC/EN 60664-1 2
- IEC 61000-4
- 
- 

→ 补充说明

- 
- 
- 1).  $C_o \geq C_p$   $L_o \geq L_p$
- 2).  $L_i < L_o \times 1\%$   $C_o \geq C_i$
- 3).  $C_i < C_o \times 1\%$   $L_o \geq L_i$
- 4).  $L_i \geq L_o \times 1\%$   $C_i \geq C_o \times 1\%$   $C_o \times 50\% \geq 0.6 \mu F$   $L_o \times 50\% \geq L_i + L_p$  / A/ B  $C_o \times 50\% \leq 1 \mu F$  C  $C_o \times 50\% \leq 0.6 \mu F$